

Model SADPmini2

New Generation Hand Held Dewpoint Meter

Rugged, light weight IP66 construction makes the SADPmini2 the most reliable dewpoint hygrometer available for rapid spot checks of dewpoint or trace moisture content in most gases and compressed air. The ultra-high capacitance sensor gives unsurpassed sensitivity, speed of response, repeatability and stability.

- **Fast Repeatable Measurements**
- **LCD Colour Screen - Real Time Graphics**
- **PC/Laptop User Software Included**

Reduced volume of the redesigned stainless steel desiccant head gives rapid spot check measurements of moisture in gases and dry compressed air.

The unique innovative keypad design allows quick, intuitive, selection of the versatile features incorporated in the instrument and modification of all set up choices. The full colour LCD display shows the measurement in two, independently selectable, units simultaneously, together with a linear analogue scale for the main units. A single button press changes the display to a real time graph of the readings in the main units.

Connection to a PC/Laptop via USB or Bluetooth also enables the user to modify and save the set up and save details via the PC. The optional logging package adds Bluetooth communication as well as very powerful logging and graphing capabilities. A mobile app is available for display of readings on smartphone or tablet.



- | | |
|-----------------|---|
| USB | ● |
| BLUETOOTH | ○ |
| LOGGING | ○ |
| SD CARD | ● |
| LI-ION BATTERY | ● |
| CALCULATOR APP | ○ |
| 2 YEAR WARRANTY | ● |

○ - Optional

KEY FEATURES:

- Full colour graphical display showing multiple units simultaneously.
- Desiccant Dry-Down Chamber for faster response by keeping sensor dry between tests.
- AutoCal Span Correction, for optimum accuracy between laboratory calibrations.
- Measurement units selectable in °C or °F dew point, ppm(v), ppm(w), mg/m³ or lb/MMSCF.
- User selectable display in choice of 10 languages: English, French, German, Spanish, Italian, Portuguese, Russian, Chinese, Japanese & Korean.
- Integral pressure calculator to display pressure dewpoints.
- Easy to use, with icons, intuitive control and latest user interface.
- Compact ergonomic design with a strong, durable and rugged body.
- Rechargeable batteries, allowing in excess of 150 hours use in continuous operation.
- USB connectivity for charging, configuration & data upload/download to pc or laptop.
- SD micro-card installed for data and settings backup, user manual retrieval and calibration history.
- User ability to update latest firmware from factory.
- Includes Certificate of Test & Calibration, referenced to National & International Standards NPL/NIST.


Additional Features With Logging Option

- Flexible programming for Data Logging with capacity in excess of 300,000 values.
- Real time logging/graphing of results with Quick Log and Snapshot features.
- Wireless Bluetooth & USB connectivity for configuration & data upload/download to pc or laptop.
- View display screen on smart phone, or tablet, via mobile App.
- Wirelessly print results to dedicated Bluetooth printer.

Desiccant Dry Down Technology

The Desiccant Head Assembly

Keeping the sensor dry between tests ensures that the SADPmini2 is always ready to carry out rapid spot checks. The unique design of the Desiccant Head achieves this by surrounding the sensor with desiccant before the head is raised for sampling. At no time is the sensor allowed to come into contact with ambient air. The chamber is also designed so that the void space and chamber wall surfaces are purged with sample gas, before exposure of the sensor, so giving faster, more accurate and reliable results.

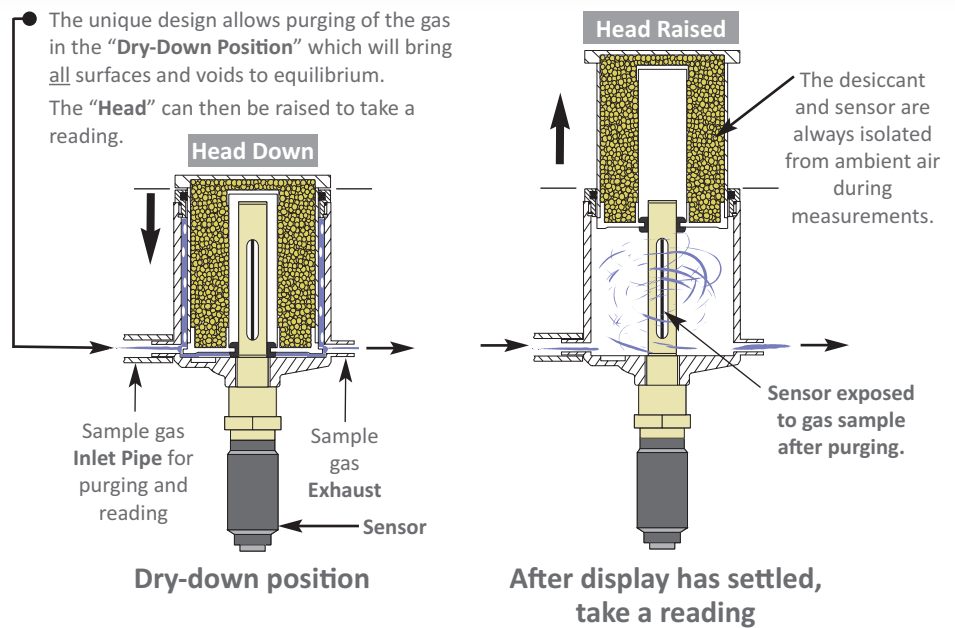

Specifications

Sensor

Sensor type

Ultra-high capacitance aluminium oxide.

Ranges

-110°C to -20°C (-166°F to -4°F) dewpoint, Silver

-100°C to 0°C (-148°F to +32°F) dewpoint, Purple

-80°C to +20°C (-112°F to +68°F) dewpoint, Blue

Calibration

Supplied with a Certificate of Test and Calibration traceable to NPL/NIST.

Accuracy

Better than $\pm 2^\circ\text{C}$ dewpoint ($\pm 3.6^\circ\text{F}$)

Repeatability

Better than $\pm 0.3^\circ\text{C}$ dewpoint ($\pm 0.54^\circ\text{F}$)

AutoCal

Span check and correction carried out by following simple on screen instructions.

Temperature coefficient

Temperature compensated for operating range.

Typical sensor response times

Dry to Wet: -110°C to -20°C dewpoint, <20 secs

Wet to Dry: -10°C to -60°C dewpoint <180 secs

Sample flow

Flow independent, recommended 5 to 10 lt/min, max 20 lt/min.

Sensor life

Typically 7-10 years, dependant on application.

Pressure dewpoints

Integral calculator for display of dewpoints at pressure for both "ideal" gases and natural gas.

Electrical

Electromagnetic compatibility

Conforms to EMC Directive 89/336/EEC, amended 95/31/EEC

Display

3.5 inch full colour LCD graphical display with backlight.

Power supply

Rechargeable Li-ion battery.

Charges from USB and universal mains charger supplied.

Battery life

In excess of 150 hours of continuous use from full charge.

Time to full charge

Empty to full, approx. 14 hours.

Warm up time

2 seconds

Micro SD card

Used as a data log backup. Also contains User Tool software and pdf of Operating Manual.

Mechanical

Weight

1.4 kg (3.1 lb)

Dimensions

215 x 108 x 124 mm (8.47 x 4.25 x 4.88 inches)

Ingress protection

IP66/NEMA 4X

Operating pressure

Atmospheric pressure. 0.3 barg (4 psig)

Operating temperature (ambient)

-20°C to +50°C (14°F to +122°F)

Operating humidity (ambient)

Max. 95% non-condensing

Storage temperature and humidity

-20°C to +50°C (-4°F to +122°F) Max. 95% non-condensing

Desiccant

Field replaceable.

Warranty

24 months faulty workmanship and materials.

Logging (Optional Extra)

Integral data storage

Up to 300,000 date and time stamped readings

Stored in up to 20 user definable folders.

Logging frequency

User definable from 5 seconds to 1 hour.

Data display

Graphical and numerical

Real time logging

Can log directly to PC when connected via USB or Bluetooth.

Bluetooth

Bluetooth connectivity provided with logging package.

SADPmini2

Dimensions



OPTIONS:		PRINTING	<input checked="" type="checkbox"/>
BLUETOOTH	<input checked="" type="checkbox"/>	PORTABLE	<input checked="" type="checkbox"/>
LOGGING	<input checked="" type="checkbox"/>	SAMPLE SYSTEM	<input checked="" type="checkbox"/>

How to Order

Model SADPmini2- [XX]-[X]-[X]-[X]-[XX]-[CC]

RANGE IN DEW POINT:

- [SR]-110°C to -20°C (-166°F to -4°F)
- [PL]-100°C to 0°C (-148°F to +32°F)
- [BL]-80°C to +20°C (-112°F to +68°F)

CARRY CASE (Optional)
[CC] Carry Case


- [B] Basic - No Communication or Logging
- [L] With Logging and Bluetooth Communication

MAINS/AC PLUG TYPE - For Charger

- [UK] Standard UK, 3 Square pin
- [US] 2 Vertical Flat Blade
- [EU] 2 Round Pins
- [AU] 2 Oblique Flat Blades with Ground

SAMPLE CONNECTION - LEFT:

- [F] Push Fit Pipe - Fir Tree Type Fitting
- [4] 0.25" (1/4") - Swagelok SS Compression Type
- [6] 6 mm - Swagelok SS Compression Type
- [8] 0.125" (1/8") - Swagelok® SS Compression Type



SAMPLE CONNECTION - RIGHT:

- [F] Push Fit Pipe - Fir Tree Type Fitting
- [4] 0.25" (1/4") - Swagelok SS Compression Type
- [6] 6 mm - Swagelok SS Compression Type
- [8] 0.125" (1/8") - Swagelok® SS Compression Type

ORDER EXAMPLE:
To order this instrument with a range of -100°C to 0°C dewpoint, with logging/ bluetooth, 6mm compression fitting (LEFT), Fir Tree Fitting (RIGHT), a EU AC power plug and Carry Case, the order code is:-
Model SADPmini2-[PL]-[L]-[6]-[F]-[EU]-[CC]

Standard Accessories (Included with each instrument)

- Basic Type:**
2m PTFE Sample Pipe
Pipe Fittings
Mains Battery Charger & Cable
Adjustable Carrying Strap
- Logging Type:**
As Basic Type, plus Logging Software

Optional Extras



Notes

Authorised Distributor Information

Corrosive Gases: The Sensor should not be exposed to corrosive gases (or corrosive contaminants in the gas sample) as these can chemically attack the sensor, impairing calibration accuracy and/or damaging it beyond economic repair. Examples of such gases are mercury (Hg), ammonia (NH₃), chlorine (Cl₂) etc. Strong oxidising agents such as ozone (O₃) should also be prevented from coming into contact with the sensor.

DASTEC S.R.L.

Representantes / Distribuidores Exclusivos

 Argentina

Tel: (+54 11) 5352 2500

Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar

 Uruguay www.dastecsrl.com.uy

 Paraguay www.dastecsrl.com.py

2338 Model SADPmini2 090519-Iss7

Alpha Moisture Systems Limited.
Registered Office: Alpha House,
96 City Road, Bradford, BD8 8ES. UK.



CERTIFICATE No. FM35600
BS EN ISO 9001:2015

Registered in England and Wales No. 3902302
VAT Registration No. GB607207563
WEEE Producer Registration No. WEEE/EA0067TX

© Alpha Moisture Systems Ltd.

Tel +44 (0) 1274 733100

Fax +44 (0) 1274 733200

Email info@amsystems.co.uk

Website www.amsystems.co.uk

Product specification may be subject to change.