




SUBMERSIBLE LEVEL TRANSMITTERS

With **Capacitive Ceramic sensor**

HYDROCER



- ▶ Accuracy 0.2% (Hydrocer '1': 0,1%)
- ▶ Capacitive Ceramic Sensor
- ▶ Perfect long term stability
- ▶ Temperature compensated

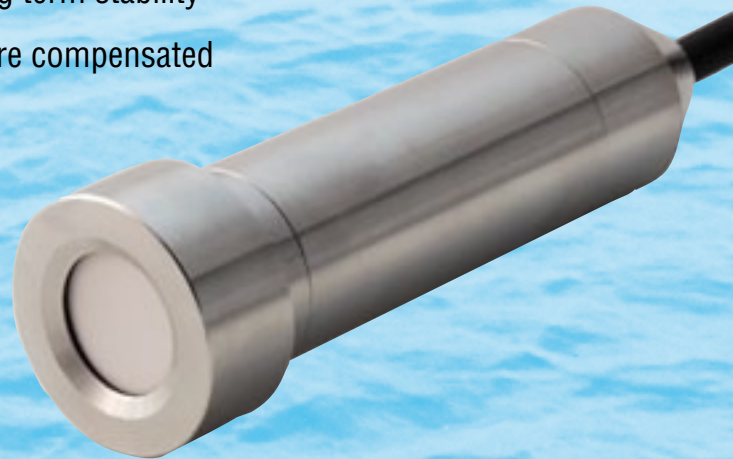

The "Hydrocer" is a hydrostatic submersible level transmitter with cable (IP 68) for level measurement in water & waste water, pulp, slurry, chemicals, etc.

The "Hydrocer" is based on a **Capacitive Ceramic sensor** / diaphragm and has a Fixed Range (Type FR) and an adjustable version by HART® Protocol, type Hydrocer '1' (accuracy 0,1%) The instrument has active temperature compensation and a **perfect long term stability**.

Made by:

 **KLAY-INSTRUMENTS B.V.**

Nijverheidsweg 5
P.O. Box 13
Tel. +31-521-591550

7991 CZ DWINGELOO
7990 AA DWINGELOO
Fax +31-521-592046

The Netherlands
E-mail: info@klay.nl
Website: www.klay.nl

DASTECS S.R.L.

Representantes / Distribuidores Exclusivos

 Argentina

Tel: (+54 11) 5352 2500

Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar

 Uruguay www.dastecsrl.com.uy

 Paraguay www.dastecsrl.com.py

Specifications

- Ranges : from 0.1 bar to 2 bar
- Output signal : 4-20 mA / 2-wire (option: HART® Protocol)
- Accuracy : 0.2% from adjusted span (Hydrocer 'I': 0,1%)
- Power supply : 9 - 36 Vdc
- Protection : IP 68
- Process temperature : -10° to + 70°C
- Sensor material : Ceramic Al₂O₃
- Sensor sealing : Viton o-ring (standard)
- Other wetted parts : AISI 316
- Material cable : PE Polyethylene (Option: Hytrel or PTFE)



Capacitive ceramic sensor

Specifications can change without notice

Ordering Information


ORDERING CODE*	FIXED RANGE:	HYDROCER-CABLE (...m)-FR-Calibration*		
	ADJUSTABLE RANGE (by HART®):	HYDROCER-I-CABLE (...m)-RANGE*-H		
	RANGES HYDROCER 'I': 1: 0 - 0,5 ... 1,5 mWC 2: 0 - 1 ... 4 mWC 3: 0 - 3 ... 10 mWC 4: 0-10 ... 20 mWC		↑	↑
MOUNTING OPTIONS				
- Mounting connection: Flange DIN or ANSI (specify size)			F	
- Other top mountingconnections. Example: G2" thread (specify)			X	
OPTIONS				
- SPECIALS: For example: other cable material (specify)				G

* Always specify cable length and calibration at ordercode

Application

The Hydrocer can be used for levelmeasurement in all kind of fluids, Like water & waste water, pulp, slurry, chemicals, etc. Typical applications are Level measurement in:

- Basins
- Deep wells
- Tanks / vessels
- Underground tanks
- Ballast tanks (shipbuilding)

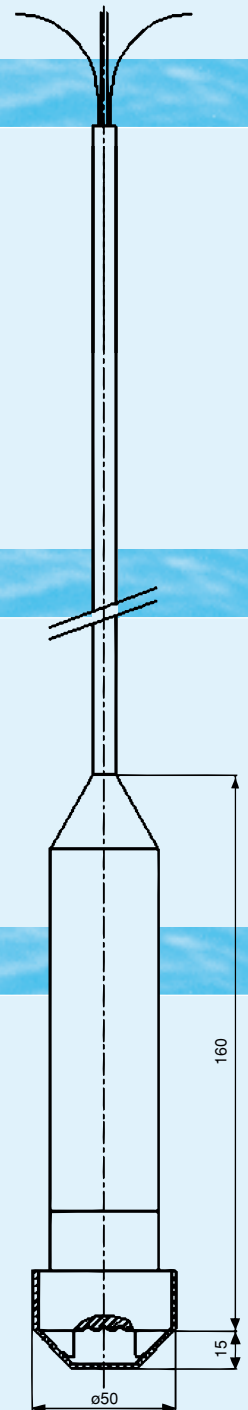


General Information

- **Active Temperature compensation**
All "Hydrocer" level transmitters are fully temperature compensated
- **EMC / CE**
Klay Instruments manufactures all Transmitters according to the European CE rules.
- **Diaphragm protection**
All "Hydrocer" transmitters will be delivered with a diaphragm protection cap as standard.

Accessories



Cable clamp
Art. no. 20636



Junction Box FMD(IP67)
Art. no. 20069

DASTEC S.R.L.
 Representantes / Distribuidores Exclusivos
 Argentina
 Tel: (+54 11) 5352 2500
 Email: info@dastecsrl.com.ar
 Web: www.dastecsrl.com.ar

	KLAY-INSTRUMENTS B.V.	Nijverheidsweg 5 P.O. Box 13 Tel. +31-521-591550 Fax +31-521-592046	7991 CZ DWINGELOO 7990 AA DWINGELOO The Netherlands Site: www.klay.nl
	D/E/Hydrocer/06-14/02		